


Fingerprint & Keypad Lock

HS0013-D98

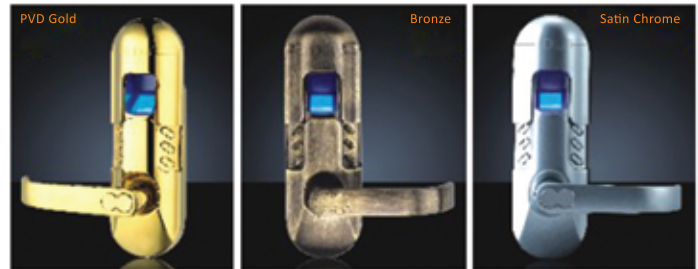

- Pure stainless steel mechanical rotating structure enable for using more than 10 years.
- It is very easy to change batteries in the lock, just need several minutes on one lock.
- If the fingerprint is not input correctly. The handle is free handle; it can protect the lock against opening by force, and prolong the using of the mechanism of the lock.
- Fingerprint user capacity 150.
- Use 9V extra power when lower power which is safe and convenient.
- In installation, just use the existing knob lock hole. No need to open the other holes.
- American standard Cylinder can be selected. When the mechanical keys are missing, the user can replace the cylinder by themselves.
- The fired user can be deleted individually without any affect on the normal application of the lock by the other users.
- A special hood is adopted to protect the fingerprint reader which is the most important part of the fingerprint door lock.
- Just need to pull up the hood and put the fingerprint on the reader to open the door. No need to input the passwords by pressing the several buttons of the keypad.

HCS Security Technology Pvt. Ltd.

Siddhi Bhawan, Jamal, Kathmandu, Nepal

Tel # 4-260622, Fax # 4-267810

Email: sales@harati.com.np

Website: www.haratistore.com